




Discharge Path Resistor

ETP-SPR series

Features

- UL recognized (UL1676).
- Metal glazed performance
- Low cost as solid resistor
- High power rating.
- 52 mm taping

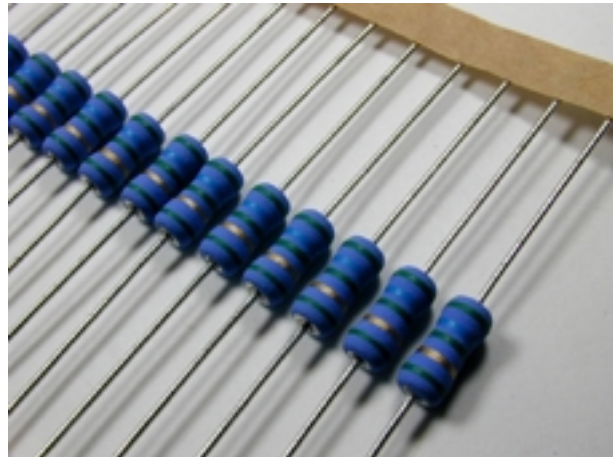

Application

- Grounding of power supply circuit
- CRT
- Switching power supply
- Surge absorber

Specifications

Type	12B	1B
Power ratings	0.5W	1W
Working voltage, max	350V	500V
Overload voltage, max.	700V	1000V
Surge withstand voltage	10KV	10KV
Resistance tolerance	J(+/-5%), K(+/-10%)	J(+/-5%), K(+/-10%)
Resistance range	1M Ω ~ 12M Ω	1M Ω ~ 12M Ω
Dimensions	ϕ 4.0 X 9 (L) mm	ϕ 5.5 X 15 (L) mm