



Noise canceling Lapel microphone unit


ETP-YU-241

Features

- Noise canceling
- Fine 2.7mm flexible Gooseneck
- 3 wires available.

Applications

- Headset
- Telephone

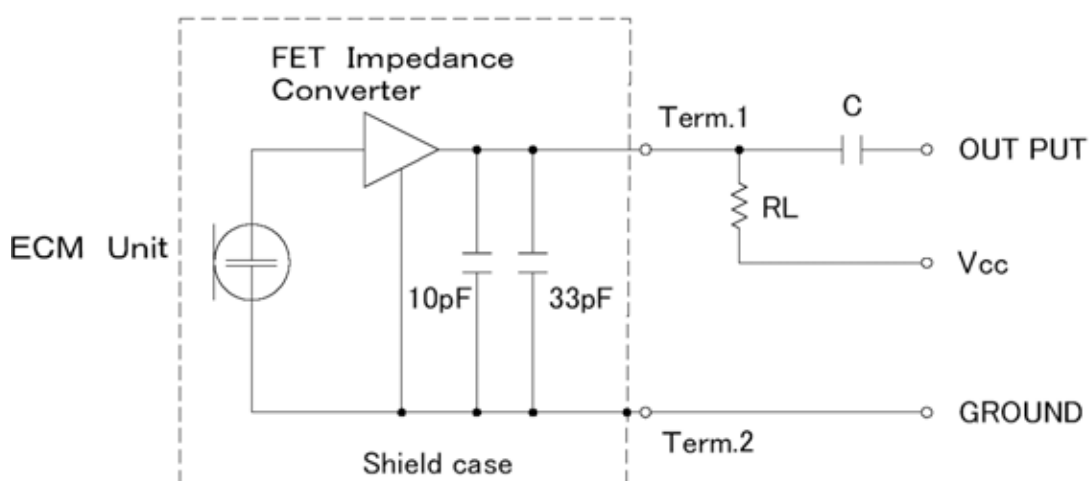

Specification

Sensitivity	-44dB \pm 3dB (0dB=1v/Pa)
Frequency range	50 ~ 20,000 Hz
Impedance	2.2K \pm 15% @1KHz.
S/N ratio	50dB min.
Operating voltage	1.0V ~ 10.0V
Current consumption	0.5mA max.
Directivity	Bi-directional
Size	8.0 x 5.5.0 (t) mm. (Head)